
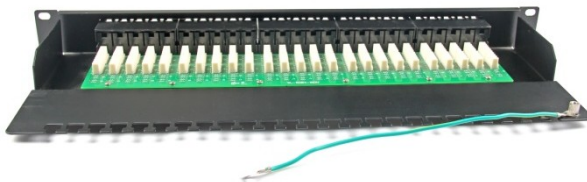


1U UTP Telephone Panel - 50 Ports

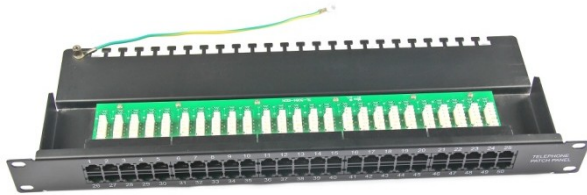

Electrical:

- Voltage rating: 125 VAC RMS;
- Current rating: 1.5 AMP;
- Contact Resistance: 20 MILLIOHMS MAX;
- Insulation Resistance: 100 MEGOHMS MIN @ 500 VDC;
- Dielectric strength: 750 VAC RMS 60Hz, 1 MIN.

Environmental:

- Storage: -40 °C to +70 °C;
- Operation: -10 °C to +60 °C;
- Conform to ANSI/TIA/EIA 568B CATEGORY 3;
- Mates with modular plug conforming to FCC PART 68.

Mechanical:

- Housing Material: PBT + 20% GF;
- Panel Frame: ST-12, Powder coating in black color;
- IDC Material: PC;
- Terminal: Phosphor Bronze, Tin plating;
- RJ 45 Jack Life: 750 Times Min;
- IDC Life: 200 Times Min;
- Wire: AWG 24-26
- Retentiveness of insertion structure: 50N 60±5s.

For More Information:

Email: sales@telex.cn

www.telex.cn

