
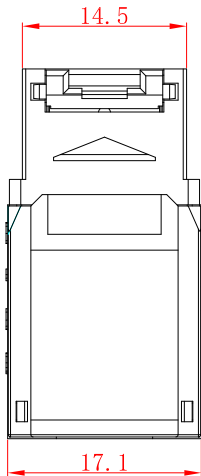

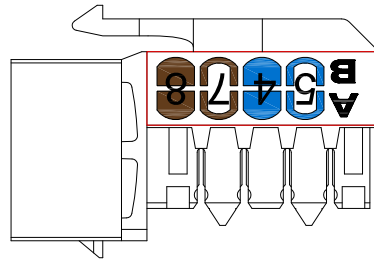

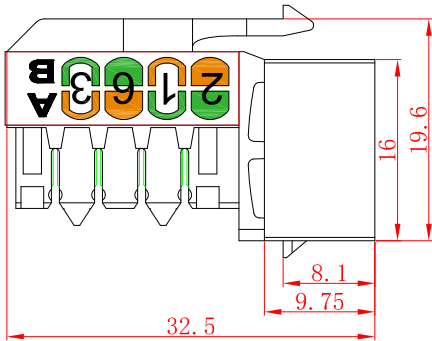
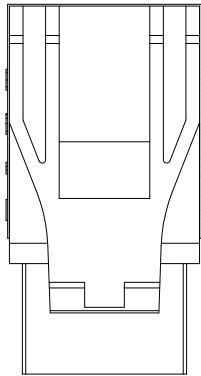


REVISION RECORD				
Serial NO	Descrion	Date	Drawn dy	Checked by



PHYSICALS
Plastic Parts: PC
Pin: Phosphor bronze gold over nickel plating, golden plated 3u"
PCB: FR-4 UL94V-0
IDC housing: PC
IDC CONDUCTOR: Phosphor bronze C5191 over nickel plating, tin-plating

ELECTRICAL
Insulation Resistance: 500 MΩ 100V/DC/1Min
Contact Resistance: ≤20 mΩ
Current Rating: 1.5 Amps
DC Resistance: 0.1 Ω
DC/AC Volt Endurance: 1000V/AC 750V 1min

MECHANICAL
Plug Insertion Life ≥750 Cycles
Durability: ≥200 TERMINATION CYCLES
Punching: 110 & Krone Tool
Plug Insertion Force: ≤20N
Plug Retention Force: ≥20N
Accommodates 22AWG~26AWG Solid

ENVIRONMENTAL
OPERATING TEMPERATURE: -20~75°C
STORAGE TEMPERATURE: -40°C TO 75°C
OPERATING HUMIDITY: 10%~90%RH
STANDARDS TIA/EIA568C, YD/T 926.3-2009, ISO/IEC11801

公差			单位	mm	TELEMAX TECHNOLOGY CO., LTD	
范围	A	B	比例	1.500		
0~3	±0.05	±0.1	材质		产品编号	HKJ-90401-D02-XX
>3~6	±0.05	±0.1	日期	Aug-24-22		
>6~30	±0.1	±0.2	版本		产品名称	90度非屏蔽打线模块（带门）
>30~120	±0.15	±0.3	质量			
>120~400	±0.2	±0.5	设计			
投影方式			审核			